

Switching device combination - SOL-SC-2ST-0-DC-2MPPT-2000SE - 1055628

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



String combiner box for photovoltaic systems up to 1000 V DC for the connection of 2x 2 strings. With surge protection and Push-in connection for the input and output side.


Similar figure

Product Description

The Solarline string combiner boxes (SCBs) are used in both small rooftop systems and large ground-mounted systems. Their functions include collecting and protecting strings and, if necessary, separating the panels from the rest of the system by means of a fire service or switch disconnectors.



Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 692685
GTIN	4055626692685
Weight per Piece (excluding packing)	5,000.000 g
Weight per piece (including packing)	5,000.000 g
Custom tariff number	85363030
Sales Key	V1 - Terminl Blocks+Boxes
Note	Made to Order (non-returnable)

Technical data

System parameter

System voltage	1000 V DC (U_{max})
Number of string inputs	2 (per MPP tracker)
Current per string	20 A (I_{max})
Number of outputs	1 (per MPP tracker)
Number of supported MPP trackers	2

Safety equipment

Surge protective device	T2
-------------------------	----

Switching device combination - SOL-SC-2ST-0-DC-2MPPT-2000SE - 1055628

Technical data

Safety equipment

Protection level U_p	≤ 3.7 kV
Total discharge current $I_{total} (8/20)$ μ s	40 kA

Cable entry

Type of cable entry	Cable gland
Cable cross section string input	2.5 mm ² ... 6 mm ²
Sealing area string input	3 mm ... 6.5 mm
Cable cross section output	2.5 mm ² ... 6 mm ²
Sealing area output	3 mm ... 6.5 mm
Cable cross section grounding	16 mm ² (2 x)
Sealing area grounding	6 mm ... 12 mm (2x)

General data

Housing material	Polycarbonate
Material cover/door	Polycarbonate (transparent)
Degree of protection	IP65
Protection class	II

Dimensions

Outer dimensions: width, height, depth	254 mm x 180 mm x 111 mm (Housing dimensions)
--	---

Ambient conditions

Ambient temperature (operation)	-20 °C ... 55 °C
---------------------------------	------------------

Drawings

Schematic diagram



Connection of the PV strings, as well as connection to the inverter

Schematic diagram



Connection of the protective grounding conductor


Switching device combination - SOL-SC-2ST-0-DC-2MPPT-2000SE - 1055628

Schematic diagram




Connection of the protective equipotential bonding conductor

Connection diagram

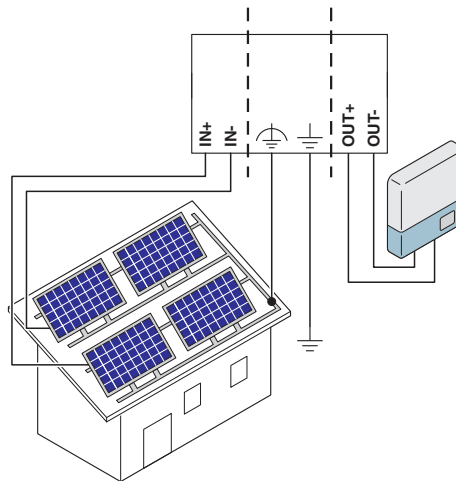


Schematic application drawing

Dimensional drawing

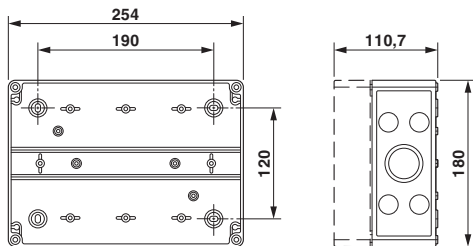

Housing dimensions

Circuit diagram



Connection of the remote indication contact on the surge protection